

# DIMS PROFIBUS Interface external

Part No. 500214




With the DIMS PROFIBUS interface it is possible to connect Dimetix laser distance sensors directly to a PROFIBUS master.

The DIMS PROFIBUS interface is an IP20 PROFIBUS/RS-422 converter and is mountable on a 35 mm DIN rail. It supports baud rates up to 12 Mbaud. Furthermore, it is possible to control up to 10 sensors – making it a cost-efficient solution.

For detailed information, please see our Application Note AN 2005 «S7 PROFIBUS connection example» and the DIMS PROFIBUS manual on the website: [www.dimetix.com](http://www.dimetix.com).

## Application example

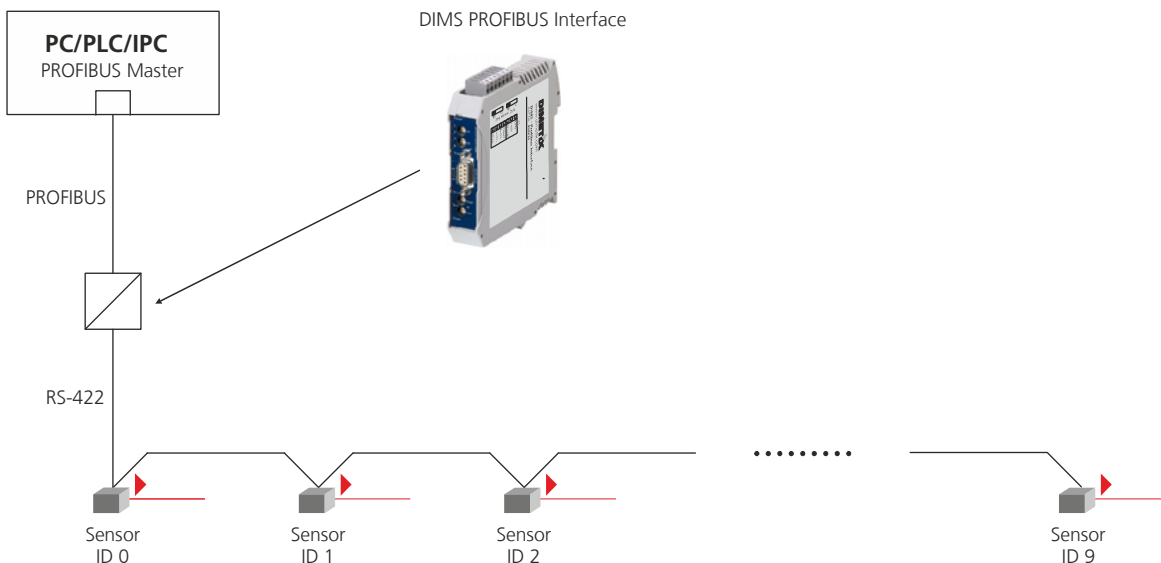

## Order information

Part No.	Description
500214	DIMS PROFIBUS Interface external PROFIBUS/RS-422 converter, IP20 module, mountable on 35 mm DIN rail applicable for DLS/FLS/D-Series

